

CAMSS30ISEH48

MAINTENANCE SHELTER SYSTEM



• **TRIED AND TRUE** •

800 984 7678 | WWW.CAMSS.COM




ALL PURPOSE MAINTENANCE SHELTER

The CAMSS30ISEH48 Shelter System is in use throughout Afghanistan for maintenance shelters. The CAMSS30ISEH48 is compact to ship (463L pallet compatible), fast to erect (does not require heavy equipment), and provides a large working area with two electric vertical lift vehicle doors measuring 16' wide by 17' high. The all aluminum frame prevents corrosion, reduces shipping weight and makes assembly fast.

A COMPLETE SYSTEM

The CAMSS30ISEH48 Shelter System measures 30' wide by 48' long with two (2) electric 16' wide by 17' high vertical lift truss doors and includes extreme temperature liner kit with plenums, HVAC ports, lighting, robust distribution panel with 60 Amp main breaker and 20 Amp receptacles and one (1) 30 Amp receptacle, aluminum personnel doors, anchoring kit, high wind kit and technical manual.

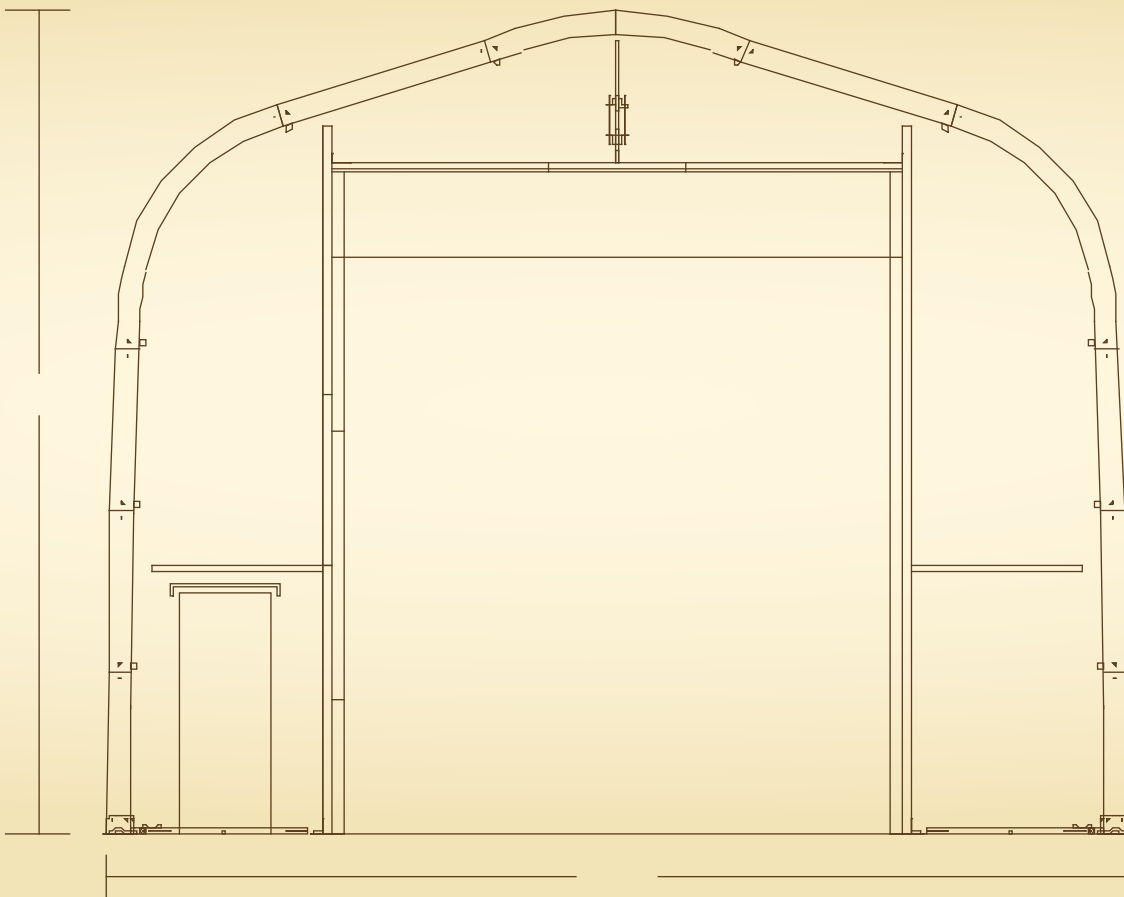



CAMSS30ISEH48
MAINTENANCE SHELTER SYSTEM



QUICK SLIP FIT AND LIFT ASSEMBLY



The CAMSS30ISEH48 Shelter assembles in sections that slip fit and bolt together. All arches assemble together beginning with the peak. After the peak and ridges have been assembled together, mechanical lifts (included with tool kit) are used to make short lifts to attach eaves and uprights. This slip fit and lift assembly design allows the CAMSS30ISEH48 to be assembled without the use of heavy equipment by a crew of six in eight hours.

ELECTRIC VERTICAL LIFT TRUSS VEHICLE DOORS (16' Wide x 17' High)

The CAMSS30ISEH48 Shelter System comes equipped with two (2) electric lift vehicle doors providing large 16' wide by 17' high access on each end of the shelter. The vehicle doors lift up vertically so as not to interfere with interior or exterior space. As well, the vertical lift doors do not leave any interior area exposed to the sky and weather as with baby buggy style doors. Aluminum box truss beams make for a robust durable door.

LIGHTING AND ELECTRICAL KIT

The electrical kit is plug and play. The rain tight 3-phase distribution box is 208V, 60Hz with a 60 Amp main breaker and includes 120V/20A receptacles and one (1) 30 Amp receptacle.

Six (6) high bay 400W metal halide lights provide bright wide area lighting and plug into the distribution box.

HEAVY DUTY FLOORING AND ECUs

The CAMSS30ISEH48 is available with heavy duty plastic flooring. Flooring can support large vehicles and equipment. Flooring fits on 463L pallets and snaps together in place as flooring. The CAMSS 5-Ton Environmental Control Units are compatible with the CAMSS30ISEH48 HVAC ports.

QUOTES & ORDERING

Available on GSA Contract and DLA
GSA Contract No. 47QSWA21D0004

800 984 7678
shelters@camss.com

Available for commercial
as well as military users

CONTACT US

800 984 7678
www.camss.com
shelters@camss.com

CAMSS Shelters
P.O. Box 2459
Kirkland, WA 98083

CAGE Code: 1M7W1
Business Size: Small



• TRIED AND TRUE •

PLCAMSS30ISEH48.01